


Installation Instructions

Solid Bench for Trucks and Sedans

Remove Headrest (if applicable):


- Some vehicles will come with **built-in** or **folding** headrest where you **DO NOT** need to remove them.
- In some cases you will need to fully lift the headrest, exposing a pin hole on the opposite base which will allow you to remove it.
- In any case where you are not able to remove the headrest covers proceed to contact our support team via phone **(800)846-8621** or email **Support@Caltrend.com** for assistance.
- You will need to align the headrest cover next to the headrest. This will allow you to determine the position the headrest needs to be installed.

TIPS FOR HEADREST REMOVAL

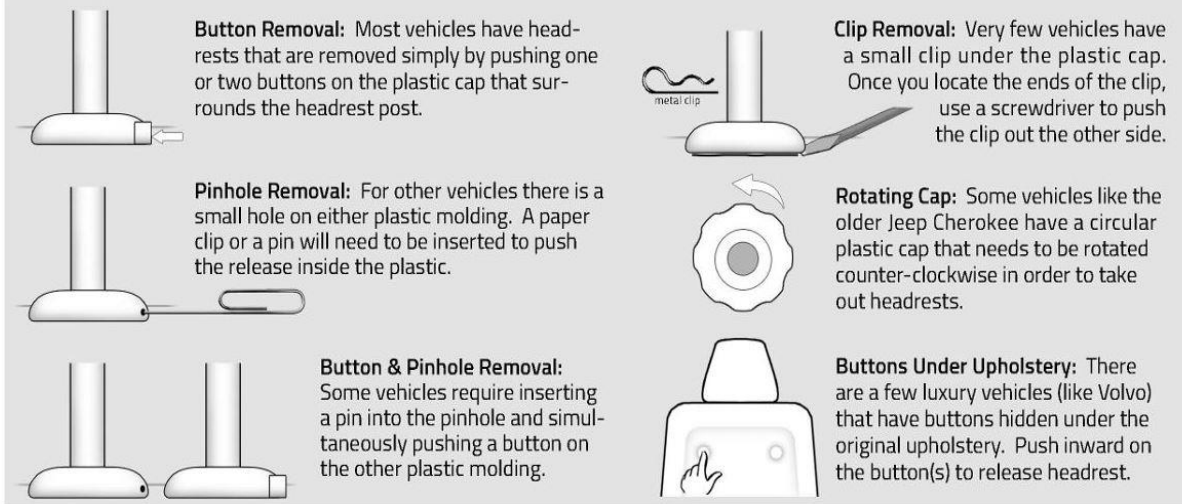

Remove Cushion (if applicable)(Sedans Only)


- You will need to remove the **Solid bottom cushion** for **most sedan** vehicles.
- There will either be a **pressure clip** on each end where you will need to firmly push up **OR** have a **clip with a locking mechanism** that you will need to slightly pull or rotate.
- Please note some of these cushions may also be hooked on the rear section with an added bracket.
- You will need to press down on the rear section of the seat and pull towards the front to undo the bracket.
- This **DOES NOT** apply to trucks as the cushion folds up.

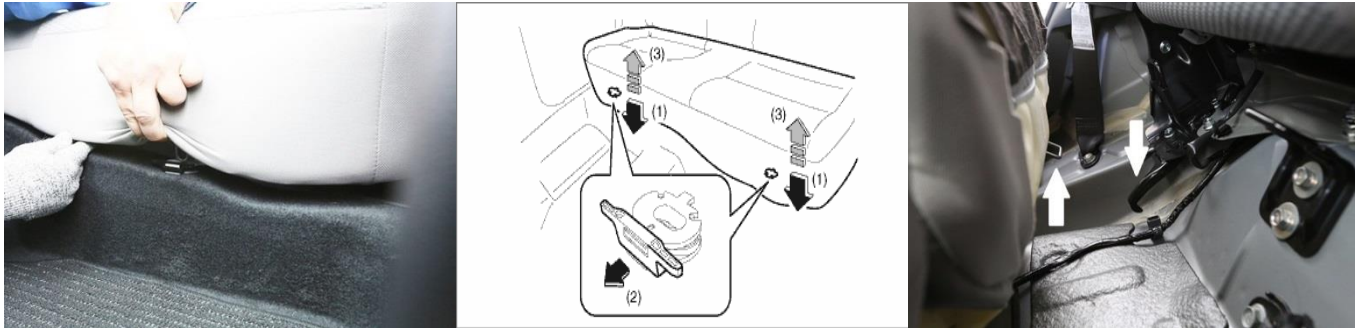

Install Cushion (Sedans Only):

- Detach all the male buckles from the cushion.
- In some occasions you will need to remove the middle seat belt to install the cover. There will be a push button on the buckle holding the seat belt. Pressing this button will remove the seat belt.
- Align the covers to the cushion, so that all the cut outs align properly.
- Note some covers will have **2 cut outs per side** for **child hooks**.

- Run the straps across from each other and attach them accordingly.
- The lower set of straps going from the rear towards the front will need to be passed in between the child hooks as shown in the first image.
- Occasionally some bottom cushions will come with either elastics with S-hooks or white plastic tabs. The S-hooks will attach under the cushion while the plastic tabs will just tuck in between the seat. (**Applies to most non removable cushions**)

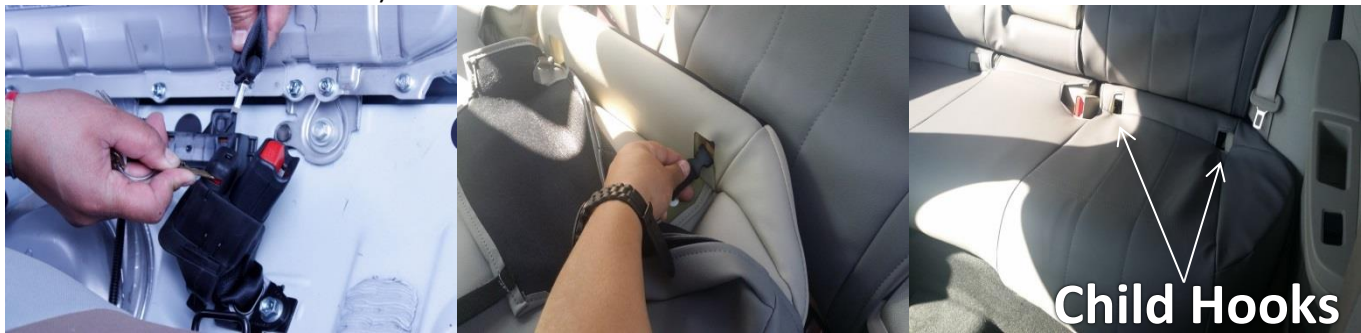

Install Cushion (Trucks Only):

- Detach all the male buckles from the cushion.
- Align the covers to the cushion, so that all the cut outs align properly.
- Note some covers will have **2 cut outs per side** for **child hooks**. These cut outs may be either on the **cushion** or the **backrest** the year, make and model of your vehicle will determine the location.
- Run the straps across from each other and attach them accordingly.
- Occasionally some covers will come with **Velcro's** which will attach under the **cushions carpeting**.



Install Backrest (Sedan Only):

- Detach all the buckles from the backrest **if applicable**
- Align the covers to the backrest, so that all the cut outs align properly.
- Note the majority of the backrest on sedan vehicles will come with Velcro's which will attach together or to the carpeting of the vehicle.
- Some vehicle will have a locking mechanism located on the shoulder of the backrest or on the trunk; this will allow you to fold your backrest forward to properly install the cover.



Install Backrest (Trucks Only):

- Detach all the buckles from the backrest **if applicable**.
- Align the covers to the backrest; so that all the cut outs align properly make sure to pass the **backrest cover under the middle seat belt**.
- Note in some occasions the **backrest** will have **Velcro's** which will attach to the **carpeting of the seats** instead of Straps. This normally applies to **older models**.
- Fold the cushion up as this will bring the backrest forward about 1 inch (applies to most Trucks only).
- Remove the male buckle from the longest strap this will allow you to easily pass the strap from the top towards the bottom.
- Reattach the male buckle to the strap and clip both buckles together, then you will need to pull the strap up to properly tighten the cover.
- There will either be a **strap with buckles** going from side to side which you will need to pass under the cushion and over the seat belt buckle to properly attach and tighten the cover **OR** it will have an elastic with an S-hook which will attach to the back of the seat or to the closest strap if fully tightened.



Armrest/Cup Holder Tray & Side Panels (Optional):

- The armrest/cup holder tray will come with Velcro on the backside which will attach to together.
- The side panels will need to be aligned properly. They will have white plastics around which will tuck in between the plastic trim of the vehicle.



Feel free to contact us for any questions or concerns:

Phone: [1\(800\)846-8621](tel:1(800)846-8621)

Email: Support@CalTrend.com

In case your seat covers get dirty or stained, you need to hand wash them with mild detergent and let them air dry. **NEVER MACHINE WASH OR DRY** as the lamination might come undone; this will also void your warranty.